



CigaretteBuster™

Short Range Wireless System

Installation Instructions

Congratulations on your purchase of a CigaretteBuster™ Short Range Wireless smoking detector to enforce your smoking rules! These instructions are for use with wireless smoking detector models xx30 used in conjunction with horn, strobe, or horn/strobe indicator. They catch smokers and transmit an RF signal to activate a horn and/or strobe 20 and 50 feet away, depending on interference such as metal, brick, or concrete. For longer distance transmission, refer to our long range RF and pager models.

1. Check list of items. When you first receive your package, open the box and make sure all of the parts that you ordered have been included. You should have the following:

- one or more detectors with mounting screws for each room to be monitored:

					
Model 5230 Smoke Detector Shell	Model 7430 Surface Mount (Cage)	Model 7630 Fake Sprinkler Head	Model 7730 Fake Deodorizer	Model 7830 Speaker Grill	Model 7930 Air Vent

- one or more indicators with mounting screws:

			
Strobe	Horn	Horn/Strobe	L ow Volume Bell/Strobe


2. Read all instructions included with your purchase.

3. Gather all units in one location and test to ensure that each piece is operational before installing.

- Check that all batteries are tightly in place with polarity of battery aligned to polarity on holder (+ to +).
- Turn switch located on underside of circuit board on detector to ON position.
- Plug indicator cord into nearby outlet.
- Light a flame 8' to 10' in front of the face of detector.**


e. **The Indicator (horn and/or strobe) will be activated after a 30 second delay.** (Our research has shown that a 30 second delay is most effective. Smokers are impacted by the alarm but are less likely to identify the source and attempt to locate and tamper with the detector. Activation may be immediate if you have ordered this feature).

f. The Detector is factory configured to send a signal to a specific Indicator. If you have ordered multiple sets of units, stop to **note which Indicator is sent a signal by this Detector.**

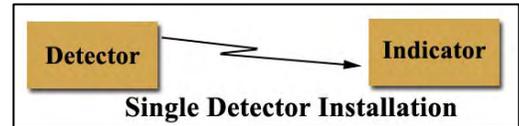

g. **Turn detector switch OFF** until ready to install.

h. Repeat procedure for any additional detectors purchased.

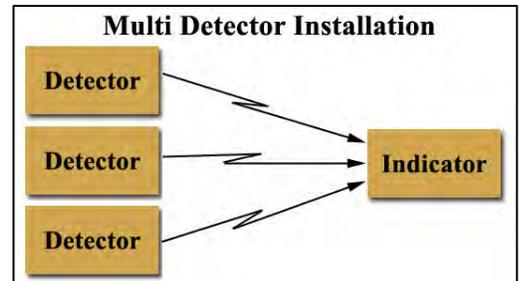

4. **Following separate User Instructions sheet, install detector in each area to be monitored.** You may want to add household smoke detectors to camouflage location of detector.

5. Indicator can be installed up to 50 feet from detectors, depending on interference in your location. Plug adaptor into electrical outlet. Test indicator in the location where you intend to install it to ensure that it picks up signals from detector(s) before installing. Once you have established the best location, you are ready to install. Screw receiver into ceiling or wall using screws provided, screwdriver, and ladder.

6. **Once installation is complete, test system again by lighting flame 8' to 10' in front of detector(s). Indicator should be activated in 30 seconds.**

7. Inspect units periodically to ensure that they have not been tampered with and are free from dirt.

Questions, comments, or concerns:

Voice Products, LLC

23715 Mercantile Road #200, Cleveland OH 44122 USA

phone: 216-360-0433 • fax: 216-360-9805

email: info@cigarettesmokedetector.com

web: cigarettesmokedetector.com

The world leader in smoking rules enforcement!